ID-Nr. 30606-001

Model SL.196.120.MV



Dimensions	
Width (external)	1197.00 mm
Depth (external)	603.00 mm
Height (external)	1965.00 mm
Width (internal)	485.00 mm
Depth (internal)	570.00 mm
Height (internal)	1869.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	215 kg
Distributed load	240.00 kg/m²
Maximum load	300 kg

Ventilation	
extraction air connection	75 DN
Recom. exhaust air quantity 30 times	31 m³/h
Differential pressure (30 times air change)	10 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of doors	2
Depth with open doors	1153.00 mm
Customs tariff number	94032080


Cabinet for acids and alkalis SL-CLASSIC
Model SL.196.120.MV, light grey (RAL 7035)

Safe and approved storage of aggressive, non flammable hazardous materials in working areas


Function / construction:


- **Robust construction and longevity:** cabinet body made of powder-coated sheet steel, safety elements assembled outside the storage compartment for increased protection against corrosion
- **Two in one:** two hermetically separated storage compartments allow the isolated storage of acids and bases in one cabinet
- **No unauthorised use:** doors lockable with profile cylinder (integration in an existing locking system possible)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **ventilation:** integrated metal-free air ducts ready for connection to a technical exhaust system with only one extraction air inlet

Front view

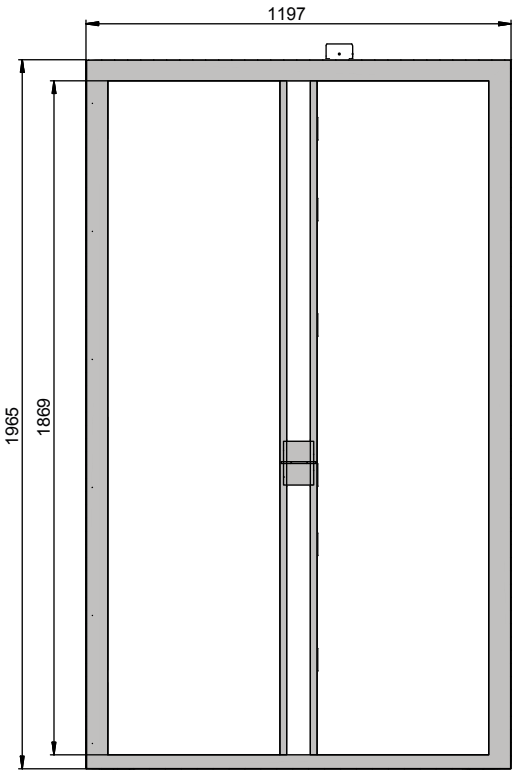

Side view

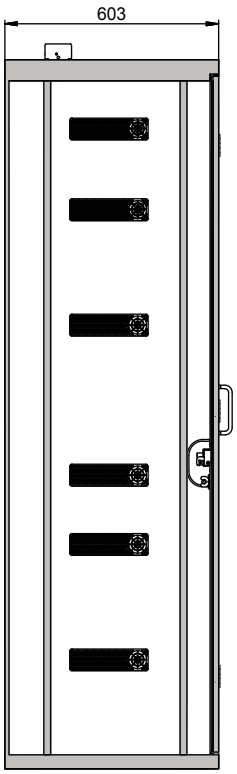

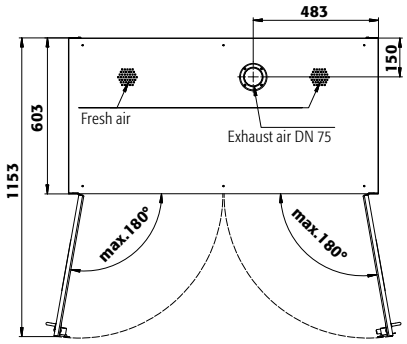

ID-Nr. 30612-001

Model SL.196.060.MH



Dimensions	
Width (external)	597.00 mm
Depth (external)	603.00 mm
Height (external)	1965.00 mm
Width (internal)	485.00 mm
Depth (internal)	570.00 mm
Height (internal)	914.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	136 kg
Distributed load	444.00 kg/m²
Maximum load	300 kg

Ventilation	
extraction air connection	75 DN
Recom. exhaust air quantity 30 times	14 m³/h
Differential pressure (30 times air change)	4 Pa


Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain


General Information	
Number of doors	2
Depth with open doors	1119.00 mm
Customs tariff number	94032080

Front view

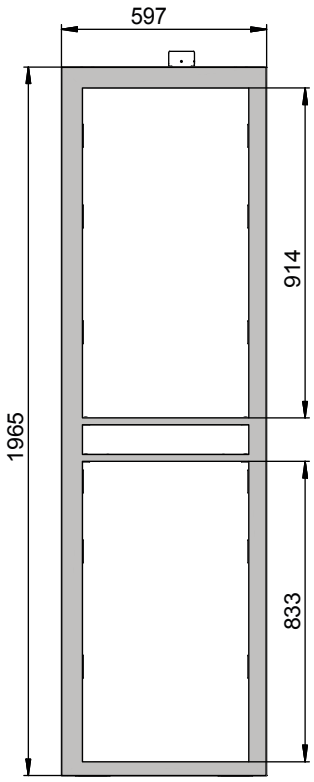

Side view

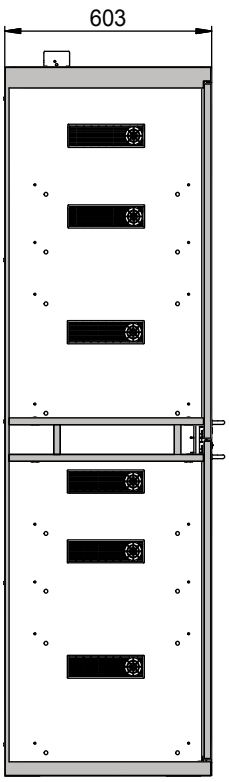



ID-Nr. 30622-892

Model SL.060.059.UB.T



Dimensions	
Width (external)	590.00 mm
Depth (external)	570.00 mm
Height (external)	600.00 mm
Width (internal)	488.00 mm
Depth (internal)	531.00 mm
Height (internal)	562.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	35 kg
Distributed load	151.00 kg/m²
Maximum load	100 kg

Ventilation	
extraction air connection	50 DN
Recom. exhaust air quantity 30 times	4 m³/h
Differential pressure (30 times air change)	1 Pa

Colouring / Surface finish	
Body colour	light grey
Body surface finish	micropearl
Door / Drawer colour	light grey
Door / Drawer surface finish	micropearl

General Information	
Number of doors	1
Depth with open doors	1112.00 mm
Customs tariff number	94032080


Cabinet for acids and alkalis SL-CLASSIC-UB
Model SL.060.059.UB.T, light grey

Safe and approved storage of aggressive, non flammable hazardous materials in working areas


Function / construction:

- **Robust construction and longevity:** made out of highly resistant melamin resin special plates
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **No unauthorised use:** door lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view




Side view

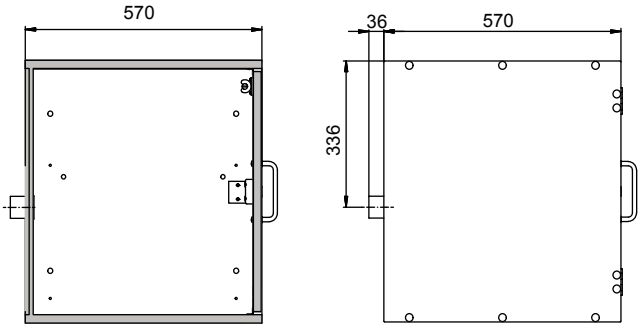

Top view





ID-Nr. 30619-892

Model SL.060.110.UB.2T



Dimensions	
Width (external)	1100.00 mm
Depth (external)	570.00 mm
Height (external)	600.00 mm
Width (internal)	489.00 mm
Depth (internal)	531.00 mm
Height (internal)	562.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	53 kg
Distributed load	93.00 kg/m²
Maximum load	100 kg

Ventilation	
extraction air connection	50 DN
Recom. exhaust air quantity 30 times	9 m³/h
Differential pressure (30 times air change)	2 Pa


Colouring / Surface finish	
Body colour	light grey
Body surface finish	micropearl
Door / Drawer colour	light grey
Door / Drawer surface finish	micropearl

General Information	
Number of doors	2
Depth with open doors	1094.00 mm
Customs tariff number	94032080


Front view

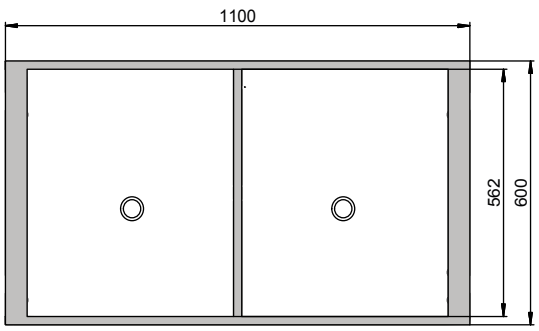


Side view

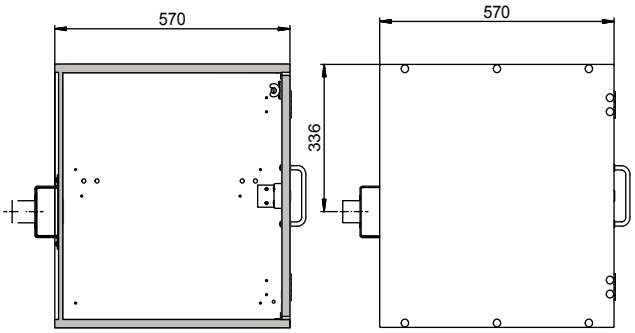

Top view

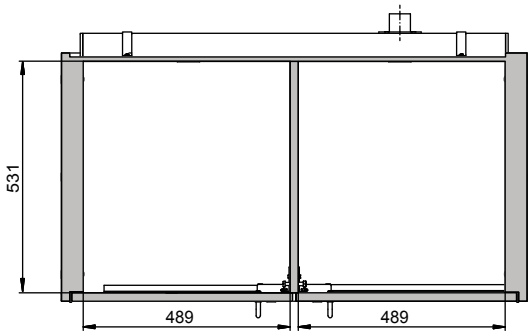

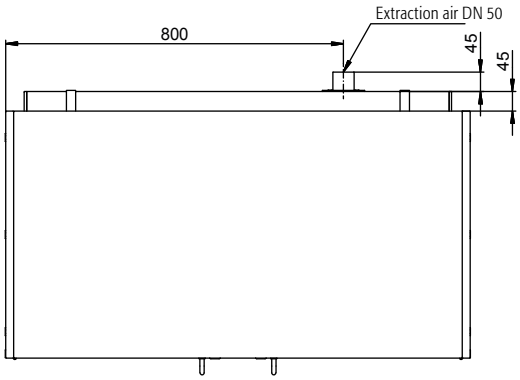

ID-Nr. 30616-892

Model SL.060.140.UB.3T



Dimensions	
Width (external)	1400.00 mm
Depth (external)	570.00 mm
Height (external)	600.00 mm
Width (internal)	489.00 mm
Depth (internal)	531.00 mm
Height (internal)	562.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	66 kg
Distributed load	82.00 kg/m²
Maximum load	100 kg

Ventilation	
extraction air connection	50 DN
Recom. exhaust air quantity 30 times	11 m³/h
Differential pressure (30 times air change)	3 Pa


Colouring / Surface finish	
Body colour	light grey
Body surface finish	micropearl
Door / Drawer colour	light grey
Door / Drawer surface finish	micropearl

General Information	
Number of doors	3
Depth with open doors	1094.00 mm
Customs tariff number	94032080


Front view

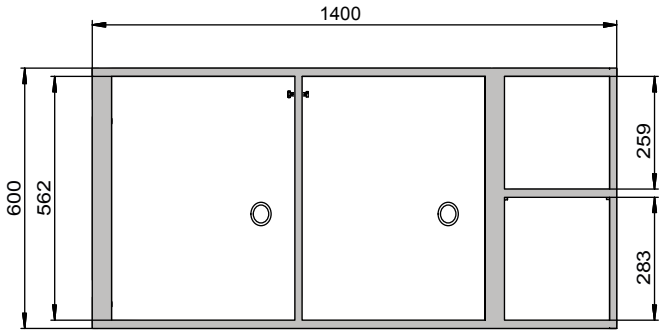


Side view

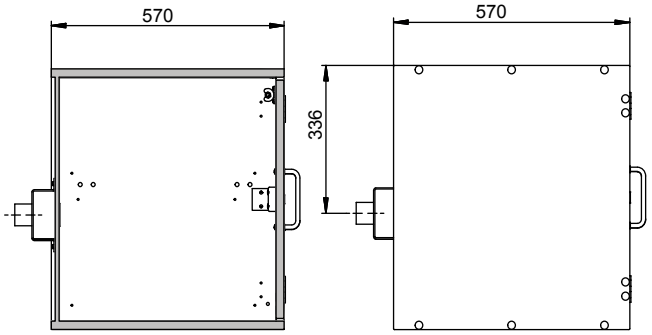

Top view

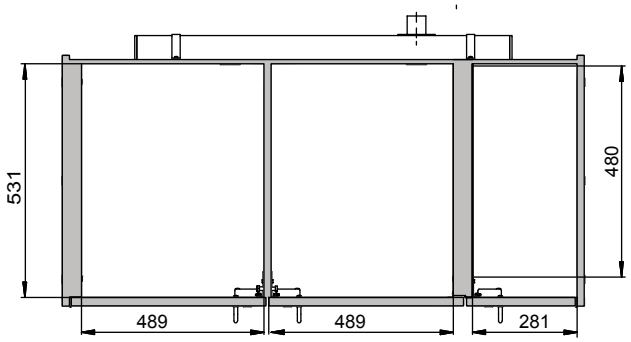


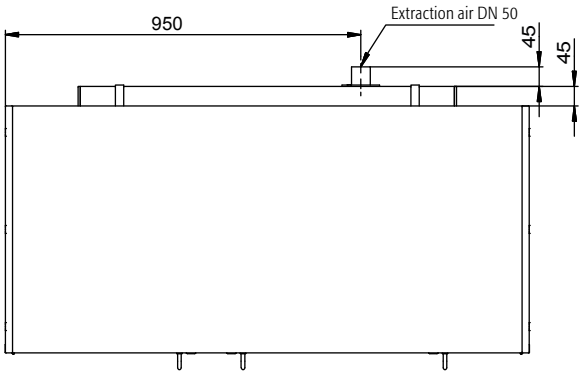



EN 16121
EN 16122
1




Front view

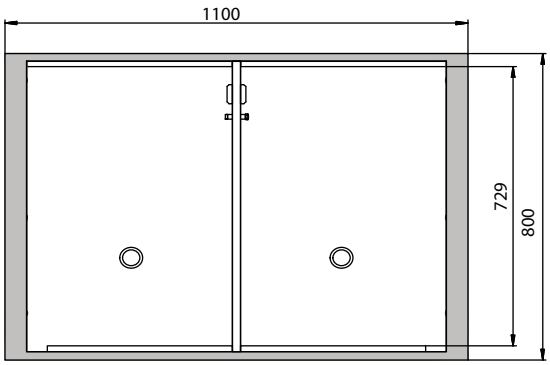


Side view

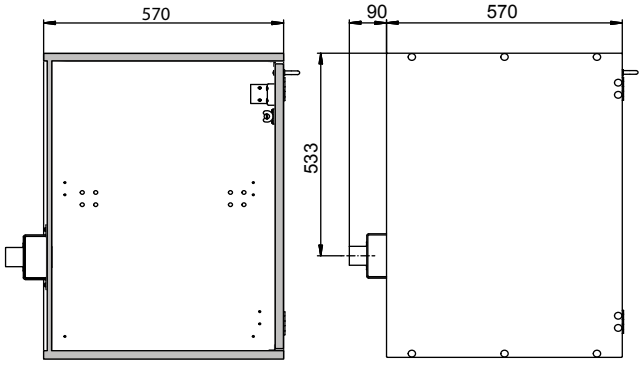

Top view

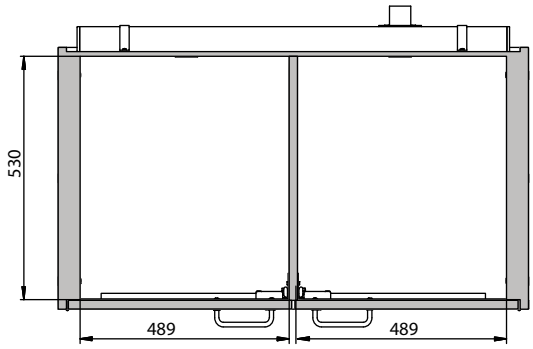


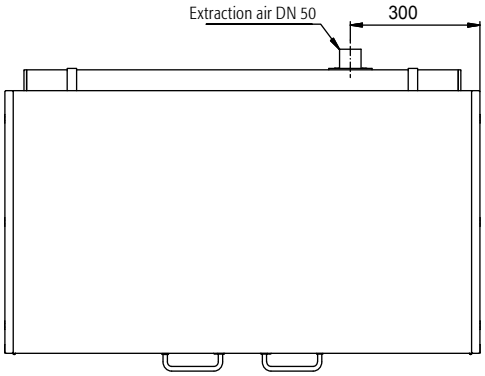



EN 16121
EN 16122
1



Front view

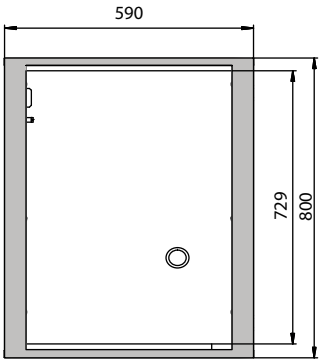

Side view

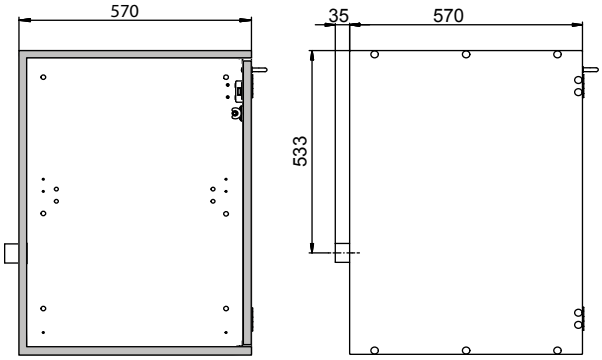

Top view

