ID-Nr. 30472-001

Model UB90.060.059.S



Dimensions	
Width (external)	593.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	470.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	120 kg
Distributed load	450.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	1 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	1
Capacity of drawer	11.50 litres
Customs tariff number	94032080


safety storage under bench cabinet UB-S-90
Model UB90.060.059.S, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view




Side view

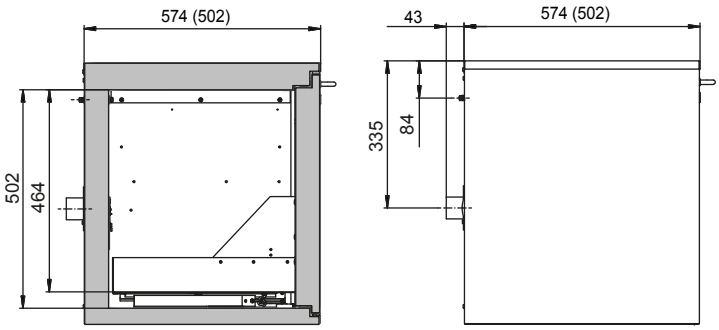

Top view



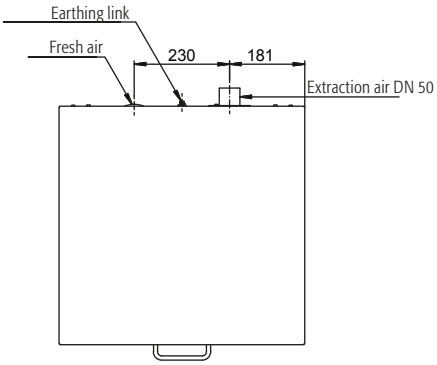

ID-Nr. 30457-001

Model UB90.060.089.S



Dimensions	
Width (external)	893.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	771.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	140 kg
Distributed load	313.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa


Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	1
Capacity of drawer	20.00 litres
Customs tariff number	94032080


Front view

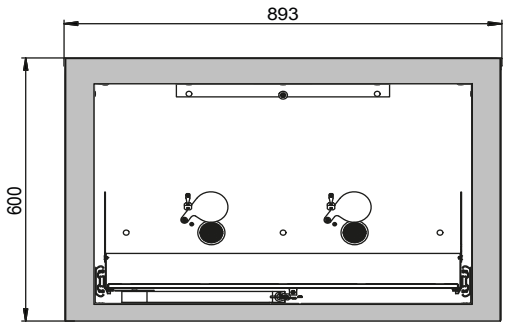


Side view

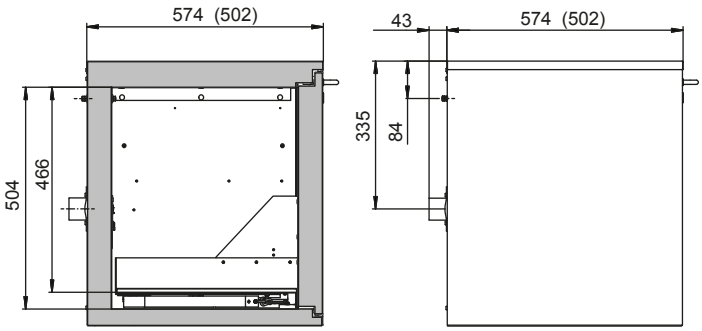

Top view

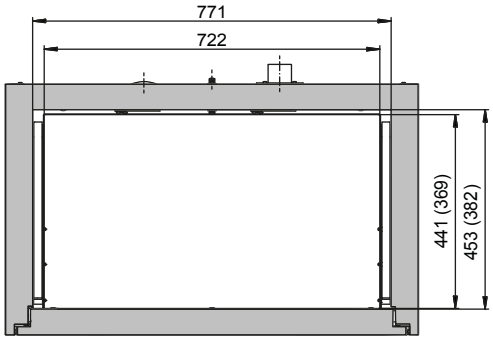

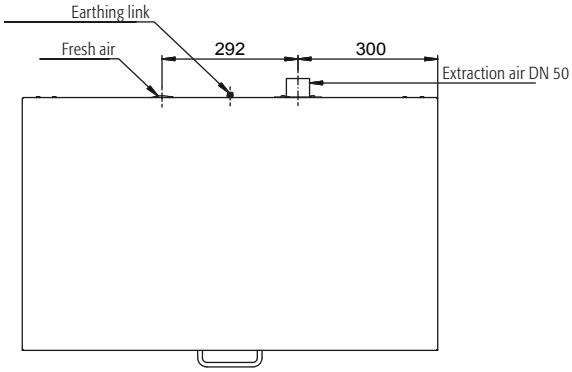

ID-Nr. 30427-001

Model UB90.060.110.2S



Dimensions	
Width (external)	1102.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	979.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	180 kg
Distributed load	277.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	2
Capacity of drawer	11.50 litres
Capacity of drawer 2	11.50 litres
Customs tariff number	94032080


safety storage under bench cabinet UB-S-90
Model UB90.060.110.2S, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Safe:** drawers fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** drawers lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view

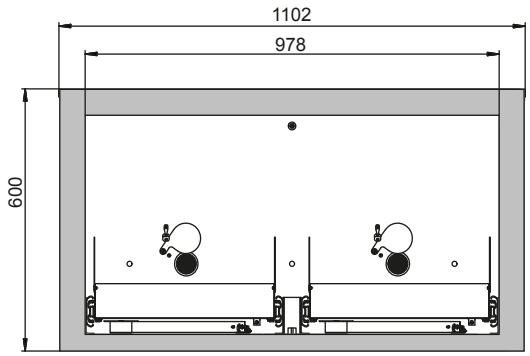


Side view

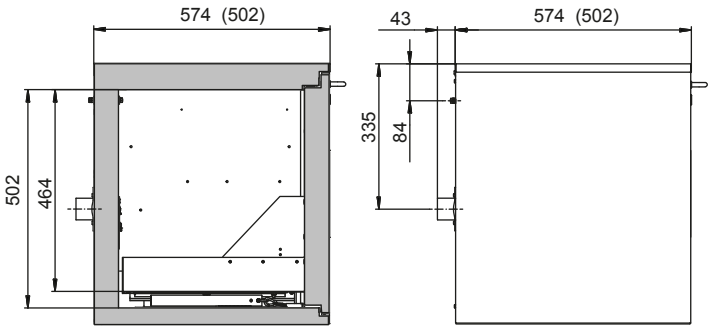

Top view

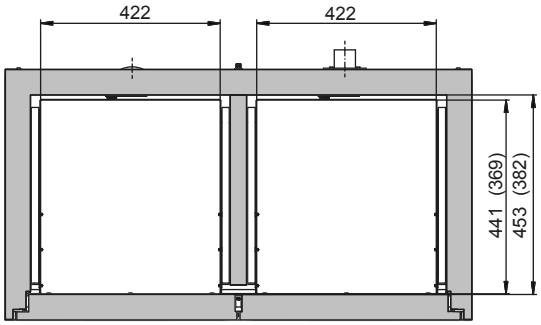

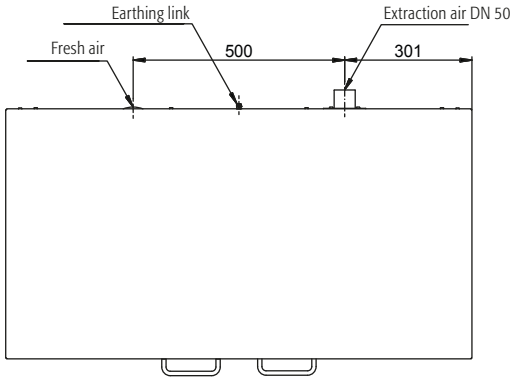

ID-Nr. 30401-001

Model UB90.060.140.2S



Dimensions	
Width (external)	1402.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	1279.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	230 kg
Distributed load	240.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	3 m³/h
Differential pressure (10 times air change)	1 Pa


Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	2
Capacity of drawer	21.00 litres
Capacity of drawer 2	11.50 litres
Customs tariff number	94032080


Front view

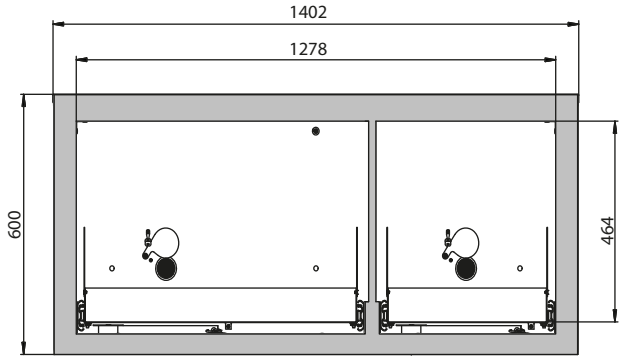


Side view

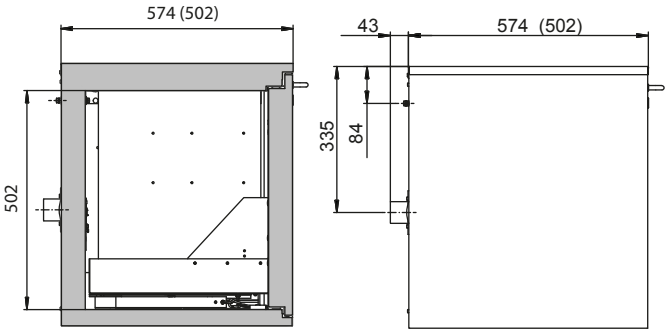

Top view

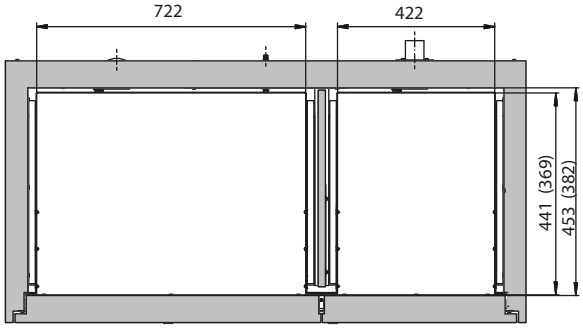

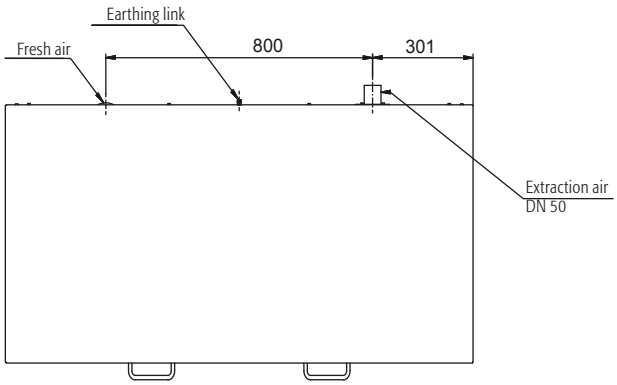

ID-Nr. 30481-001

Model UB90.060.059.T



Dimensions	
Width (external)	593.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	470.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	120 kg
Distributed load	450.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	1 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of doors	1
Door opening angle	135.00°
Depth with open doors	1044 mm
Customs tariff number	94032080


safety storage under bench cabinet UB-T-90
Model UB90.060.059.T, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Easy handling with comfort:** door stops in any position, self-closing in the event of fire
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view




Side view

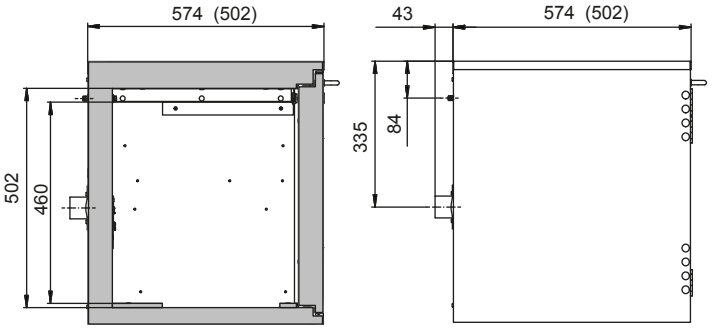

Top view



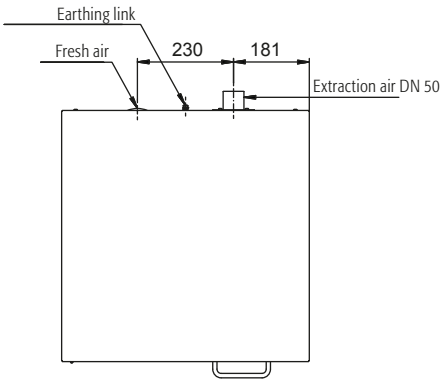

ID-Nr. 30464-001

Model UB90.060.089.2T



Dimensions	
Width (external)	893.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	771.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	140 kg
Distributed load	313.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of doors	2
Door opening angle	135.00°
Depth with open doors	992 mm
Customs tariff number	94032080


safety storage under bench cabinet UB-T-90
Model UB90.060.089.2T, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Easy handling with comfort:** doors stop in any position, self-closing in the event of fire
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **No unauthorised use:** doors lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view

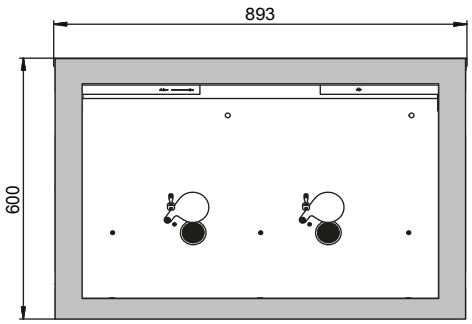


Side view

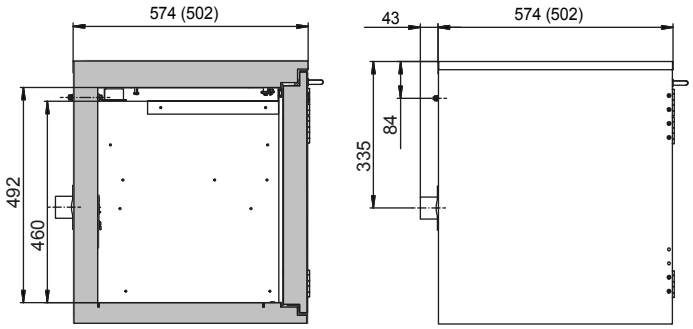

Top view

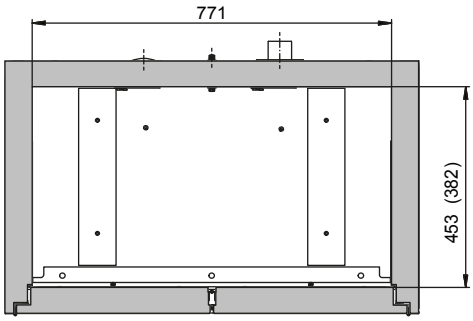

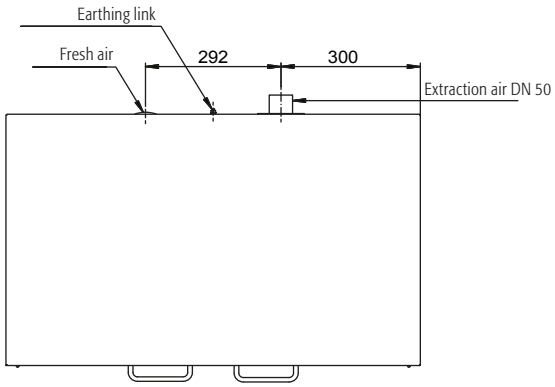

ID-Nr. 30443-001

Model UB90.060.110.2T



Dimensions	
Width (external)	1102.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	979.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	180 kg
Distributed load	277.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa


Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of doors	2
Door opening angle	135.00°
Depth with open doors	1097 mm
Customs tariff number	94032080


Front view

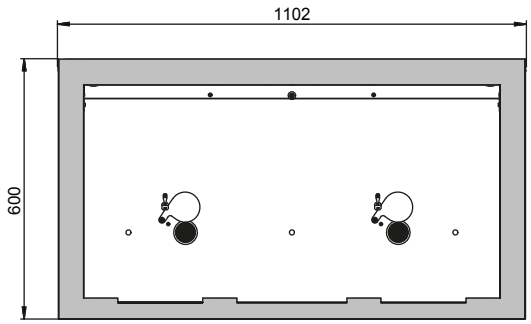


Side view

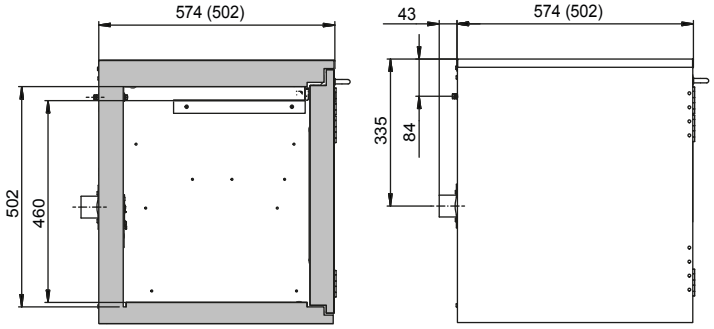

Top view

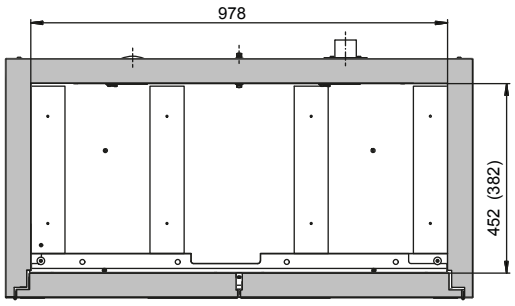

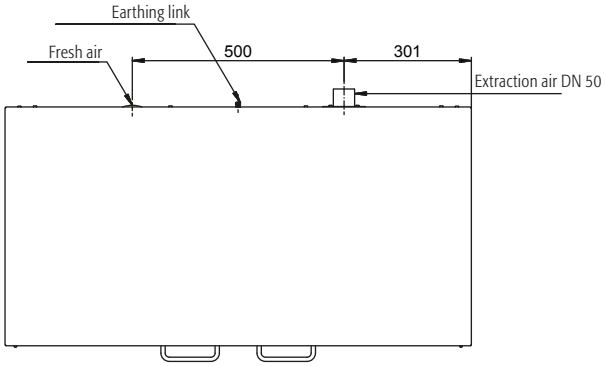

ID-Nr. 32658-001

Model UB90.080.059.060.S



Dimensions	
Width (external)	593.00 mm
Depth (external)	600.00 mm
Height (external)	800.00 mm
Width (internal)	470.00 mm
Depth (internal)	482.00 mm
Height (internal)	702.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	143 kg
Distributed load	467.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	1
Capacity of drawer	21.5 litres
Customs tariff number	94032080




safety storage under bench cabinet UB-S-90
Model UB90.080.059.060.S, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view

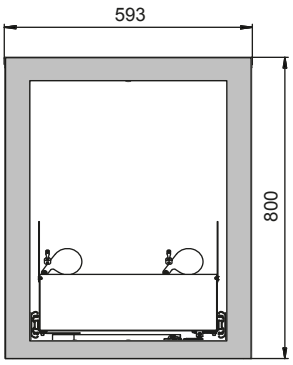


Side view

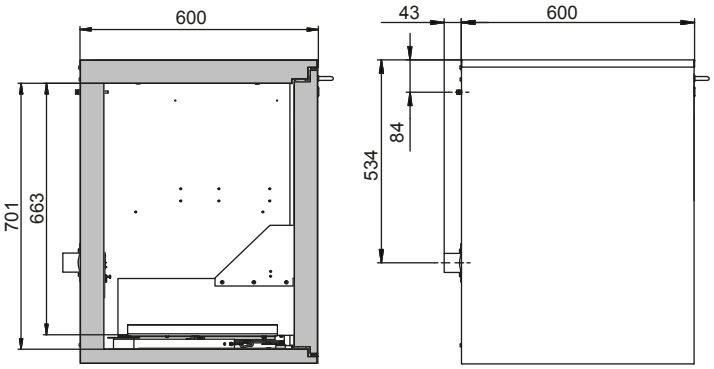

Top view

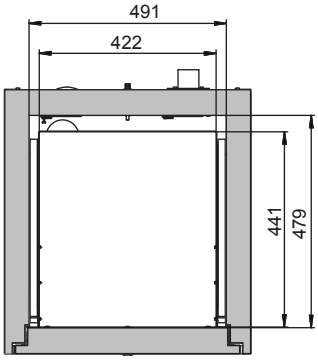

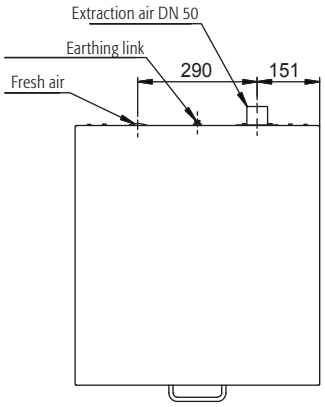

ID-Nr. 32657-001

Model UB90.080.110.060.2S



Dimensions	
Width (external)	1102.00 mm
Depth (external)	600.00 mm
Height (external)	800.00 mm
Width (internal)	979.00 mm
Depth (internal)	482.00 mm
Height (internal)	702.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	233 kg
Distributed load	302.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	2
Capacity of drawer	21.5 litres
Capacity of drawer 2	21.5 litres
Customs tariff number	94032080




safety storage under bench cabinet UB-S-90
Model UB90.080.110.060.2S, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Safe:** drawers fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** drawers lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view

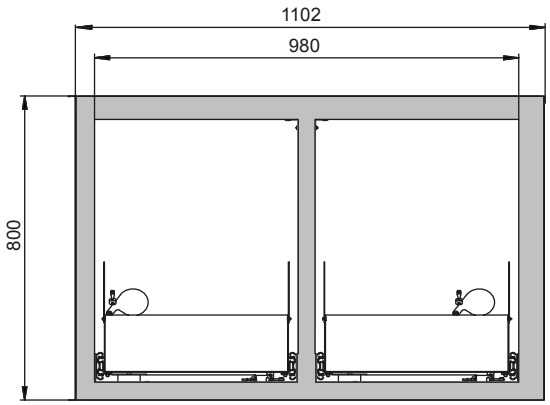


Side view

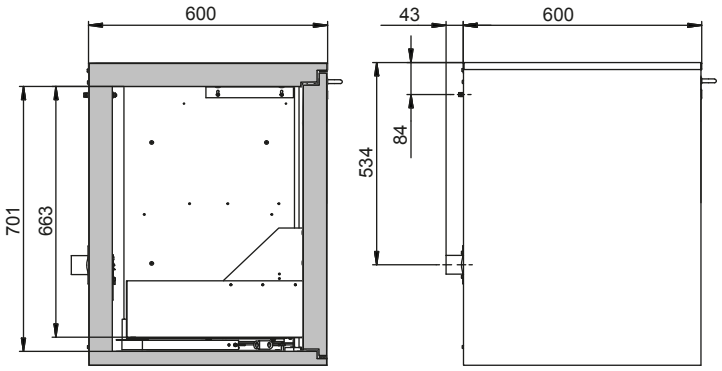

Top view

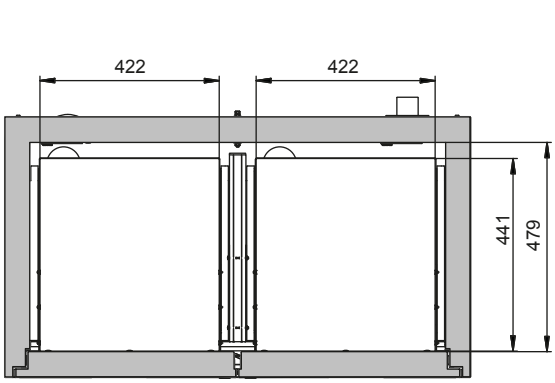

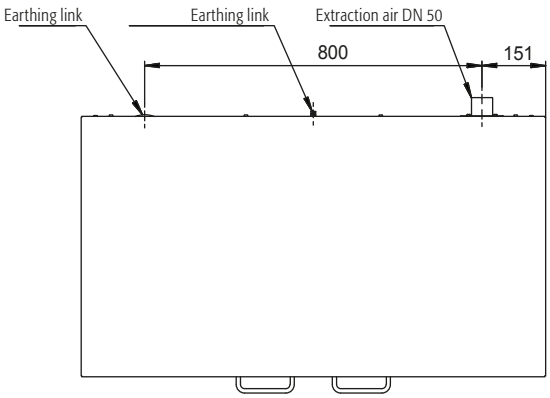

ID-Nr. 35900-001

Model UB90.080.059.060.T



Dimensions	
Width (external)	593.00 mm
Depth (external)	600.00 mm
Height (external)	800.00 mm
Width (internal)	470.00 mm
Depth (internal)	482.00 mm
Height (internal)	702.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	143 kg
Distributed load	467.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of doors	1
Door opening angle	93.00°
Depth with open doors	1044 mm
Customs tariff number	94032080




safety storage under bench cabinet UB-T-90
Model UB90.080.059.060.T, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Easy handling with comfort:** door stops in any position, self-closing in the event of fire
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view

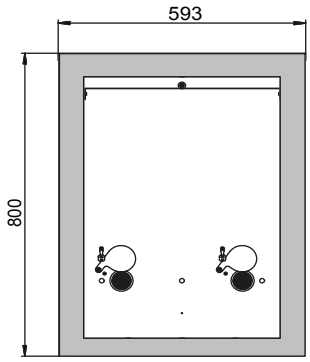


Side view

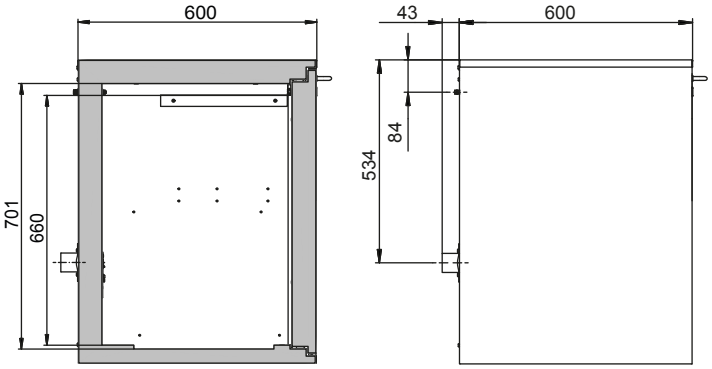

Top view



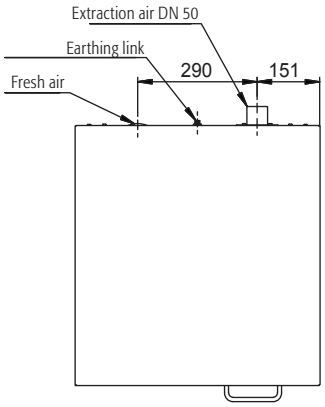

ID-Nr. 30107-001

Model UB90.080.110.075.2T



Dimensions	
Width (external)	1102.00 mm
Depth (external)	752.00 mm
Height (external)	800.00 mm
Width (internal)	979.00 mm
Depth (internal)	626.00 mm
Height (internal)	701.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	200 kg
Distributed load	259.00 kg/m²
Maximum load	300 kg

Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	4 m³/h
Differential pressure (10 times air change)	5 Pa

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain

General Information	
Number of doors	2
Door opening angle	100.00°
Depth with open doors	1277 mm
Customs tariff number	94032080


safety storage under bench cabinet UB-T-90
Model UB90.080.110.075.2T, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Easy handling with comfort:** doors stop in any position, self-closing in the event of fire
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **No unauthorised use:** doors lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view

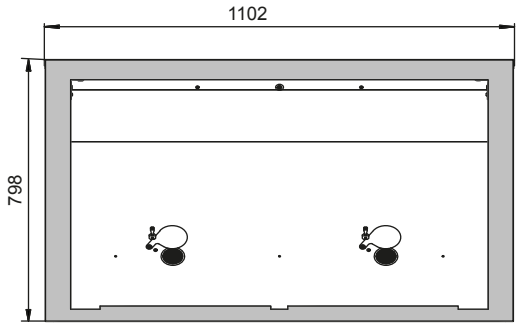


Side view

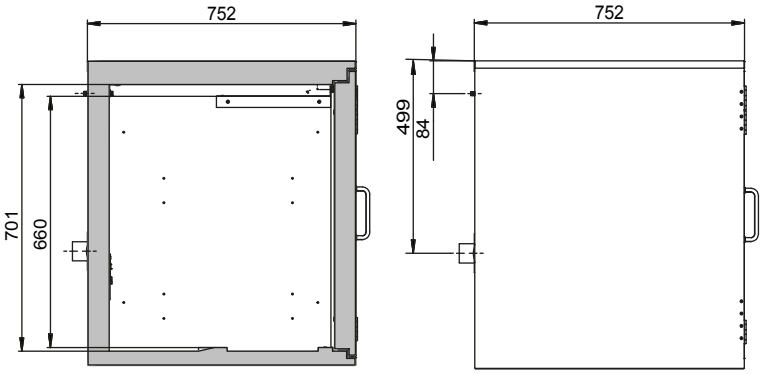

Top view

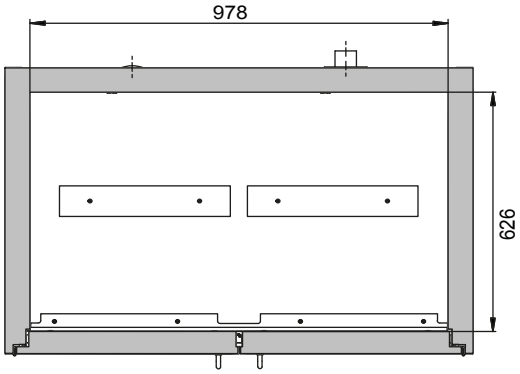

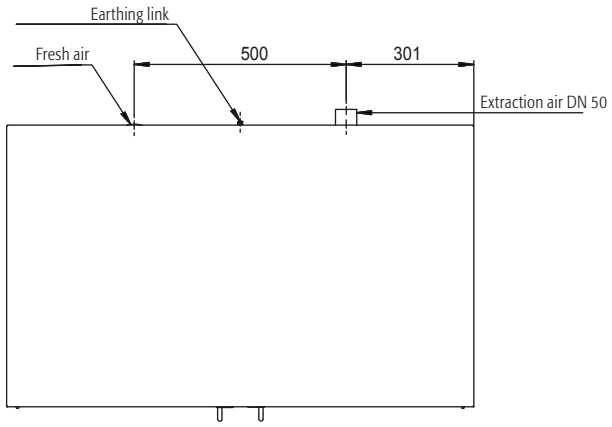

Atelier Boonen info@atelierboonen.be · www.atelierboonen.be