
Atelier Boonen - DRS Prisma VI

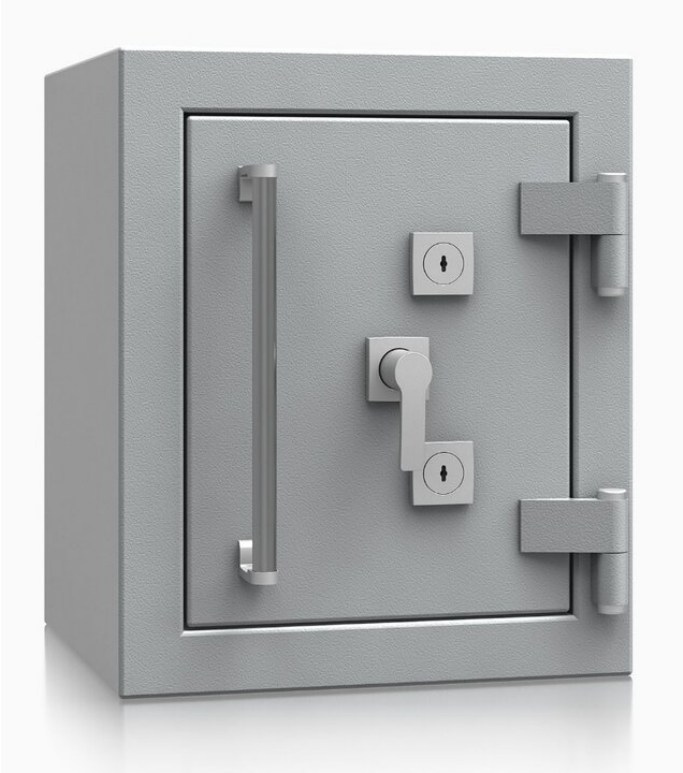

Additional information

brand: De Raat Safes

DRS Prisma VI – burglary- and fire-resistant safe, EN 1143-1 Grade 6 (ECB·S)

The DRS Prisma VI is ECB·S-certified to EN 1143-1, Grade 6: an exceptionally high level of security, intended for situations where the value or sensitivity of the contents involves an extreme risk profile. The certification confirms that the safe withstands the heaviest mechanical and thermal attack methods. It has also been fire-tested to EN 15659 – LFS 30P: thirty minutes of protection for paper documents, intended for situations with a limited fire risk.

What sets the DRS Prisma VI apart is its size. Grade 6 usually means heavy, bulky safes; this range delivers the same level of security in a compact format, with capacities from 69 to 168 litres. The smallest model, the Prisma VI/0, is currently the smallest Grade 6 safe on the market: ideal where space is limited, but the value to be protected is not.

The body and door are built from multiple walls and fitted with burglary-resistant armouring, with additional protection against drilling, grinding and thermal attack techniques. The door locks on four sides: solid bolts cover three sides, while on the hinge side a hook-in profile engages the body over the full height of the door. An attack on the hinges therefore has no effect on the locking. External hinges allow the door to open to 180°, keeping the entire interior accessible.

Behind the door lies a second line of defence: internal passive relocking systems that activate automatically during a targeted attack and block the locking mechanism. They work entirely mechanically, without power or electronics, and form an integral part of the security construction.

As EN 1143-1 requires for Grade 6, the DRS Prisma VI is fitted as standard with at least two EN 1300-certified Class C locks, with a choice of double-bit key lock, mechanical combination lock, electronic code lock or a combination of these. Electronic locks can optionally be fitted with a time delay or time windows. Inside, the shelves are height-adjustable. The safe is prepared for anchoring to the floor and to the rear wall, so that even a compact model stays firmly in place.

The DRS Prisma VI is available in six models and shares its construction with the DRS Prisma VII. It is aimed at those who want to protect substantial values in a small footprint: jewellers and diamond dealers, the financial sector, professional environments with strict insurance requirements, but equally private individuals with a significant collection. Unsure between Grade 5, 6 or 7? Our selection guide helps you when you are considering where to buy a safe in Belgium.

See also our other fire resistant safes or read how to approach buying a safe in Belgium, with delivery and installation by our own team.

Fire resistant 30 min for paper
Burglary resistant Grade 6
Indication value storage Grade 6: € 250,000 cash or € 500,000 valuables

- Tested and certified by ECB·S in accordance with the European standard EN 1143-1, Grade VI.
- Fire-tested 30 minutes for paper to EN 15659 LFS 30P.
- Multi-wall construction with armouring against drilling, grinding and thermal attack techniques.
- Four-sided locking: solid bolts on three sides and a hook-in profile over the full door height.
- Internal passive relocking systems that block the locking mechanism during a targeted attack.
- External hinges; door opening to 180°.
- Fitted as standard with two EN 1300 Class C locks; key, combination or code locks can be combined.
- Height-adjustable shelves; prepared for floor and rear-wall anchoring.
- Colour: light grey RAL 7035 or anthracite grey RAL 7024.

Model specifications

Model	Outer dimensions (mm)	Internal dimensions (mm)	Volume (L)	Weight (kg)	Shelves
DRS Prisma VI/0	H790 W660 D620	H550 W410 D305	69 L	740 kg	1
DRS Prisma VI/2	H990 W690 D620	H750 W440 D305	101 L	930 kg	1
DRS Prisma VI/3	H1190 W690 D620	H950 W440 D305	127 L	1090 kg	2
DRS Prisma VI/4	H1340 W690 D620	H1250 W440 D305	148 L	1220 kg	2
DRS Prisma VI/5	H1490 W690 D620	H1250 W440 D305	168 L	1340 kg	3